

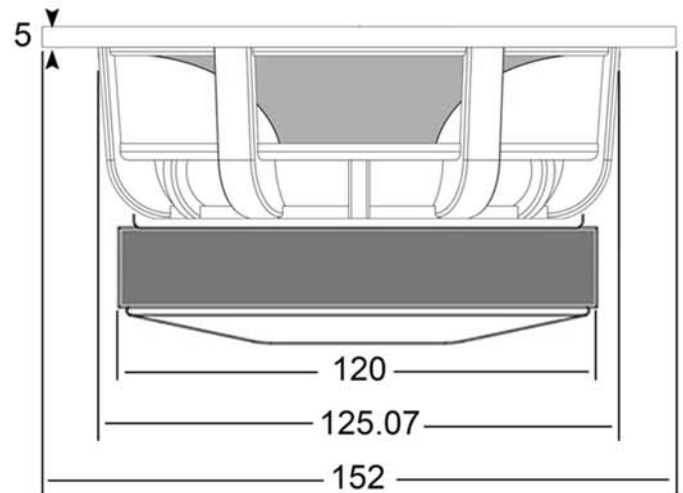
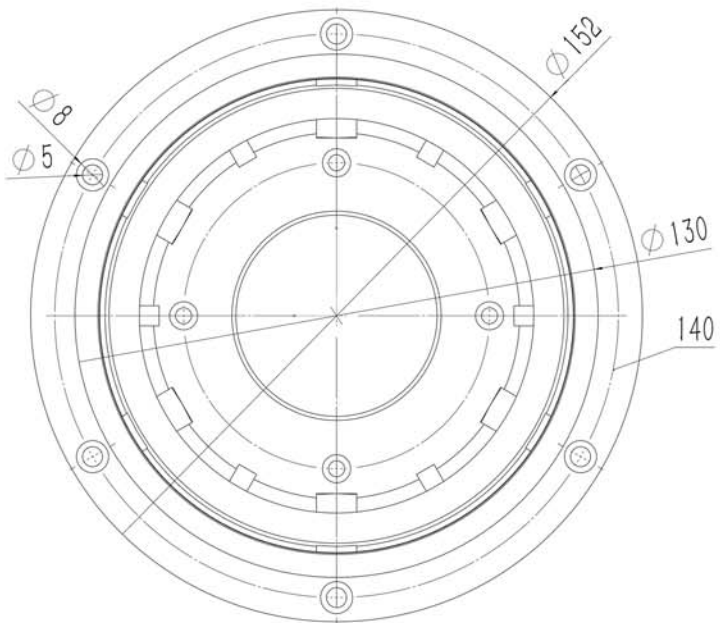


The R152-K-08 mid-woofer features a woven Kevlar cone. Smooth and extended frequency response with a controlled roll off makes the R152-K-08 mid-woofer the perfect choice for studio and hi-end home audio.

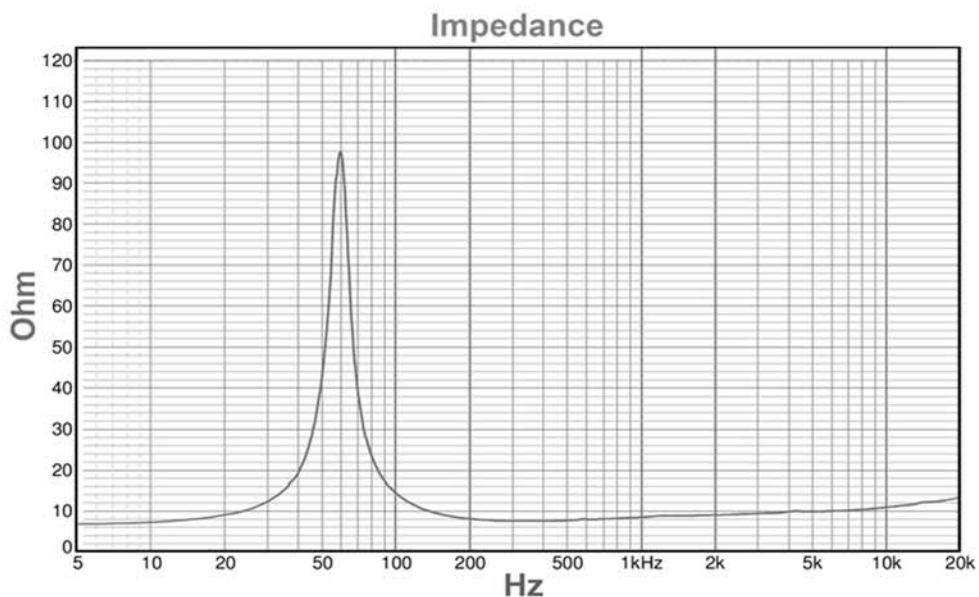

A large 39mm CCAW voice coil wound on a perforated fibreglass former produces high stability, exceptional power handling and excellent efficiency. This is augmented by an ultra-low distortion magnet assembly with aluminum stabilizing ring and extended copper cap on the pole. R152-K-08 is finished in a generously ventilated cast aluminum chassis and a flat Conex spider for proven durability.

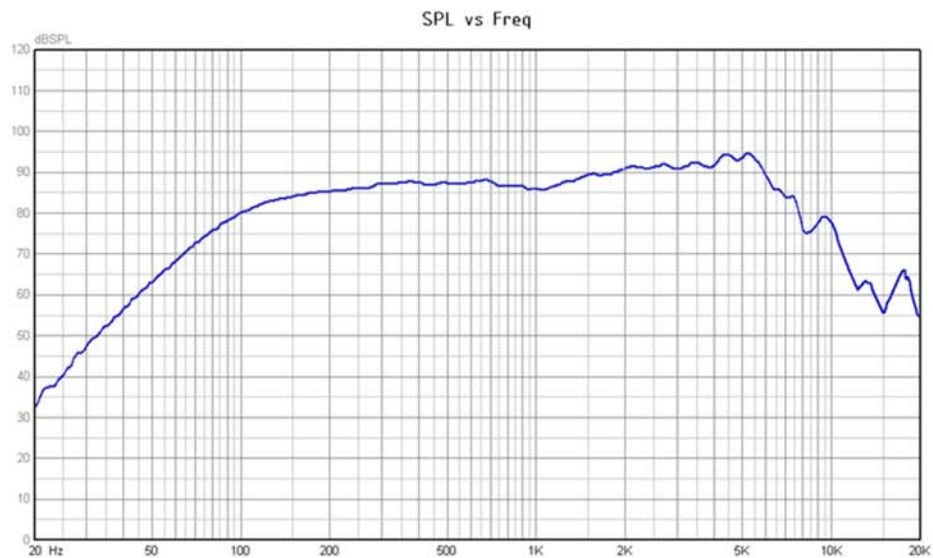

TS Parameters

Domain: Free air

$R_{vc} = 6.60$ Ohms

$F_r = 59.00$ Hz

$S_d = 108.000$ cm²

$Q_{ms} = 7.31$

$M_{ms} = 113.00$ g

$Q_{es} = 0.445$

$C_{ms} = 0.56$ mm/N

$Q_{ts} = 0.420$

$V_{as} = 6.60$ m M³

$N_0 = 0.29$ %

$L_e = 0.134$ mH

$BL = 8.31$ TM

$SPL_0 = 87.37$ dB

$X_{max} = 4$ mm

Continuous Power = 60w (IEC 268-5)



Precision Engineered - Rigorously Tested - Meticulously Manufactured

Rival Acoustics reserves the right to change technical data